

- 802.11a/n/ac (5G Wi-Fi)
- MIMO 2x2
- Power of the transmitter up to 28 dBm
- Integrated antenna 12 dBi
- PoE injector 24V
- Reset button on the injector

WB-2P-LR5 is a high-performance wireless user station designed for up-to-date high speed service provision via Wi-Fi technology.

Wireless connection

WB-2P-LR5 is developed for connection to Wi-Fi access network which might be constructed using base stations within long distances.

Performance


To ensure a stable and uninterrupted operation, the device is equipped with high-performance processors providing high routing rates and ensuring the effective operation of FBWA (Fixed Broadband Wireless Access) technology.



WB-2P-LR5 interfaces

Name	WAN	LAN
WB-2P-LR5	802.11a/n/ac	1xG

Application scheme

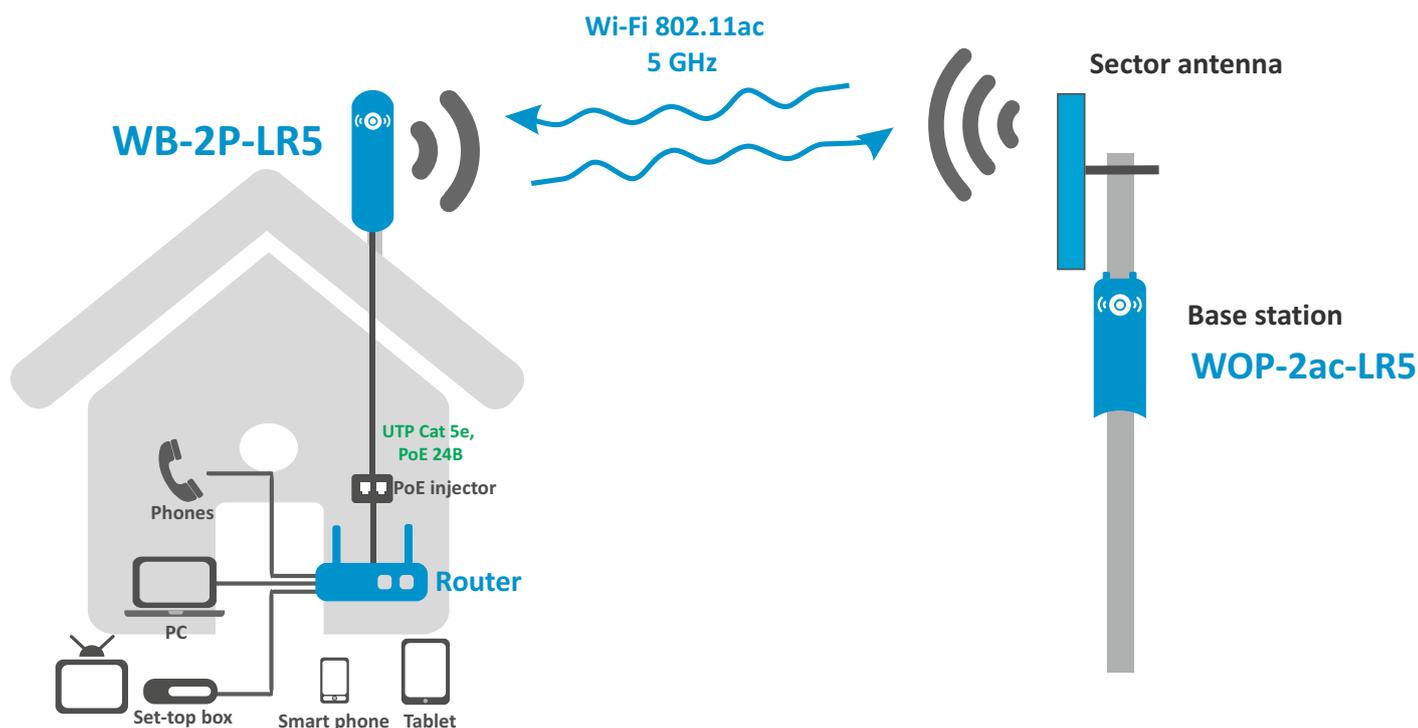

Features and capabilities

Interfaces

- 1 Ethernet port 10/100/1000BASE-T (RJ-45)
- Wi-Fi 5-6 GHz IEEE 802.11a/n/ac
- Service Wi-Fi 2.4 GHz 802.11b/g/n (short-range interface for adjustment and device setup during the installation period)¹

WLAN

- Support for IEEE 802.11a/n/ac standards
- Data aggregation, including A-MPDU (Tx/Rx) and A-MSDU (Rx)
- WMM-based priorities and packet planning
- Access points detection
- Spectrum analyzer
- Polling
- Support for wireless bridges (WDS)
- Channel list limitation
- Support for fixed center frequency

Security

- Centralized authentication via RADIUS server (WPA/WPA2 Enterprise)
- WPA/WPA2 encryption
- 64/128/152-bit WEP encryption

Network functions

- VLAN Trunk
- Management VLAN
- General VLAN
- Transparent Mode
- MVR
- Static routing
- Time synchronization via NTP
- Wireless transparent bridge
- PPPoE client
- VLAN Mapping
- Limiting the number of MAC addresses learned

Configuration

- Firmware upgrade and configuration via DHCP-autoprovisioning, TR-069
- Remote management via Telnet, SSH
- Web interface
- SNMP (Monitoring)

Wireless interface parameters

- Frequency range 5170 - 5835 MHz
- Frequency range 5170 - 6160 Mhz (for WB-2P-LR5 rev.B and rev.C)
- BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation
- MIMO 2x2
- Bandwidth: 5, 10, 20, 40, 80 MHz
- Channel selection in 5 MHz steps

Operating channels²

- 802.11a/n/ac: 36-165 (5170-5835 MHz)

Operating channels (for WB-2P-LR5 rev.B and rev.C)²

- 802.11a/n/ac: 36-230 (5170-6160 MHz)

Data rate³

- 802.11a: up to 54 Mbps
- 802.11n: up to 300 Mbps
- 802.11ac: up to 867 Mbps

Receiver sensitivity

- 5-6 GHz: up to -94 dBm

Maximum power of the transmitter

- 5-6 GHz: 24 dBm (28 dBm)¹

Antenna parameters

- Antenna gain: 12 dBi
- Linear polarization: H/V
- SWR: 2.0:1 max.
- Beam width (H): 60°
- Beam width (V): 15°

Physical specifications

- Power consumption up to 8 W
- RAM 128 MB
- Flash 32 MB
- Power supply: PoE 24 V
- Operating temperature: from -45°C to +65°C
- Operating humidity: up to 95%
- Dimensions (WxHxD): 80x282x66 mm
- IP54 protection
- Pole mounting

Ordering information

Name	Description
WB-2P-LR5	Wireless user station WB-2P-LR5 PoE injector 24 V, power cable and mounting kit are included

¹For WB-2P-LR5 rev.C

²The number of channels and the value of the maximum output power will vary according to the rules of radio frequency regulation in your country.

³The maximum wireless data rate is defined according to IEEE 802.11a/n/ac standard. The real bandwidth can be different. Conditions of the network, environment, the amount of traffic, building materials and constructions and network service data can decrease the real bandwidth. The environment can influence the network coverage range.

Contact us


+7 (383) 274 10 01
+7 (383) 274 48 48


eltex@eltex-co.ru


www.eltex-co.com

About ELTEX

Eltex company is a leading Russian developer and manufacturer of communication equipment with more than 25 years of history. Complete solutions and their seamless integrability into the Customer's infrastructure are the priority growth areas of the company.