

- Non-blocking architecture
- Advanced L2 features
- L3 switches¹
- Support for Multicast (IGMP Snooping, MVR)
- Advanced security functions (L2-L4 ACL, IP Source Guard, Dynamic ARP Inspection, etc.)

MES24xx series switches with PoE support provide end users connection to networks of large enterprises, small and mid-sized businesses and service providers via 1G/10G interfaces.

The switches support Virtual Local Area Networks (VLAN), multicast groups, and have advanced security functions.



MES2408P



MES2428P



MES2408CP

Technical features

| | MES2408CP | MES2408P ^{CE} | MES2408PL | MES2428P ^{CE} | MES2424P ^{CE} | MES2448P | MES2420-48P |
|---|-----------------------------|-----------------------------|-----------------------------|-----------------------------|--|---|---|
| Interfaces | | | | | | | |
| 10/100/1000BASE-T PoE/PoE+ | 8 | 8 | 8 | 24 | 24 | 48 | 48 |
| 100BASE-FX/1000BASE-X (SFP) | – | 2 | 2 | – | – | – | – |
| 1000BASE-X (SFP)/10GBASE-R (SFP+) | – | – | – | – | 4 | 4 | 4 |
| Combo 10/100/1000BASE-T/100BASE-FX/1000BASE-X | 2 | – | – | 4 | – | – | – |
| Console port RS-232 (RJ-45) | | | | 1 | | | |
| Performance | | | | | | | |
| Bandwidth | 20 Gbps | 20 Gbps | 20 Gbps | 56 Gbps | 128 Gbps | 176 Gbps | 176 Gbps |
| Throughput for 64-byte packets ² | 14.88 MPPS | 14.88 MPPS | 14.88 MPPS | 41.658 MPPS | 95.2 MPPS | 130.95 MPPS | 130.95 MPPS |
| Buffer memory | 512 KB | 512 KB | 512 KB | 512 KB | 1.5 MB | 2 MB | 2 MB |
| RAM (DDR3) | 256 MB | 256 MB | 256 MB | 256 MB | 512 MB | 512 MB | 1 GB |
| ROM (SPI Flash) | 32 MB | 32 MB | 32 MB | 32 MB | 64 MB | 64 MB | 64 MB |
| MAC table | 8192 | 8192 | 8192 | 8192 | 16384 | 32768 | 32768 |
| ARP table | | | | 1000 | | | |
| VLAN table | | | | 4094 | | | |
| L2 Multicast groups (IGMP Snooping) | 509 | 509 | 509 | 509 | 1023 | 4094 | 4094 |
| L3 Multicast groups (IGMP Proxy) | – | – | – | – | 512 | 2048 | 2048 |
| SQinQ rules | 128 (ingress), 256 (egress) | 1024 (ingress ³), 512 (egress) | 2048 (ingress ³), 1024 (egress) | 2048 (ingress ³), 1024 (egress) |
| MAC ACL rules | 381 | 381 | 381 | 381 | 509 | 766 | 766 |
| IPv4/IPv6 ACL rules | 219/128 | 219/128 | 219/128 | 219/128 | 384/192 | 640/320 | 640/320 |

¹For MES2424P, MES2448P, MES2420-48P.

²Values are given for one-way transmission.

³Mac-based vlan and SQinQ share common hardware resources.

CE — the device complies with CE requirements.

Technical features (continued)

| | MES2408CP | MES2408P ^{CE} | MES2408PL | MES2428P ^{CE} | MES2424P ^{CE} | MES2448P | MES2420-48P | | |
|-------------------------------|---|------------------------|-----------|------------------------|---|---|-------------|--|--|
| L3 IPv4 Unicast routes | — | — | — | — | 496 | 2048 | 2048 | | |
| L3 IPv6 Unicast routes | — | — | — | — | 124 | 512 | 512 | | |
| VRRP routers | — | — | — | — | 32 | 32 | 32 | | |
| L3 interfaces | 20 VLANs, up to 5 IPv4 addresses in each VLAN, up to 300 IPv6 GUA for all VLANs | | | | 20 VLANs, up to 5 IPv4 addresses in each VLAN, up to 124 IPv6 GUA for all VLANs | 20 VLANs, up to 5 IPv4 addresses in each VLAN, up to 512 IPv6 GUA for all VLANs | | | |
| Link Aggregation Groups (LAG) | 8 groups, up to 8 ports in one LAG | | | | 24 groups, up to 8 ports in one LAG | | | | |
| QoS | 8 egress queues per port | | | | | | | | |
| Jumbo frames | maximum packet size is 10000 bytes | | | | maximum packet size 12288 bytes | | | | |

Features and capabilities

Interface features

- Head-of-line blocking (HOL) protection
- Auto MDI/MDIX
- Jumbo frames
- Flow Control (IEEE 802.3X)
- Port mirroring (SPAN, RSPAN)

MAC table

- Independent learning mode per VLAN
- MAC Multicast Support
- Configurable aging time of MAC addresses
- Static MAC Entries
- MAC change events monitoring on ports
- MAC Flapping logging

VLAN features

- Voice VLAN
- IEEE 802.1Q
- Q-in-Q
- Selective Q-in-Q
- GVRP
- MAC-based VLAN
- Protocol-based VLAN

L2 Multicast features

- Multicast profiles
- Static Multicast groups
- IGMP Snooping v1,2,3
- IGMP Snooping fast-leave
- IGMP Proxy-report
- IGMP authorization via RADIUS
- MLD Snooping v1,2¹
- MLD Snooping fast-leave¹
- IGMP Querier
- MVR

L2 features

- STP (Spanning Tree Protocol, IEEE 802.1d)
- RSTP (Rapid Spanning Tree Protocol, IEEE 802.1w)
- MSTP (Multiple Spanning Tree Protocol, IEEE 802.1s)
- Rapid-PVST+²
- STP Root Guard
- STP Loop Guard
- STP BPDU Guard
- BPDU Filtering
- Spanning Tree Fast Link option
- Layer 2 Protocol Tunneling (L2PT)
- Loopback Detection (LBD)
- Port isolation
- Storm Control for different types of traffic (broadcast, multicast, unknown unicast)
- ERPS (G.8032v2)²

L3 Multicast features²

- IGMP proxy (RFC 4605)
- IGMP proxy fast-leave

L3 features²

- Support for static IPv4 and IPv6 routes
- Support for dynamic routing protocol RIPv1/2, OSPFv2/3
- Support for VRRP

Link Aggregation functions

- LAG
- LACP
- LAG Balancing Algorithm

Service functions

- Virtual Cable Testing (VCT)
- Optical transceiver diagnostics

¹ Not supported by MES2448P, MES2420-48P in the current firmware version.² Only for MES2424P, MES2448P, MES2420-48P.

CE — the device complies with CE requirements.

Features and capabilities (continued)

IPv6 support

- IPv6 Host
- Dual-stack IPv4, IPv6

Security functions

- DHCP Snooping
- DHCP Option 82
- IP Source Guard
- Dynamic ARP Inspection (Protection)
- MAC-based authentication, Port Security, static MAC entries
- Port-based authentication IEEE 802.1x
- Guest VLAN
- DoS attacks prevention
- Traffic segmentation
- DHCP clients filtering
- BPDU attacks prevention
- PPPoE Intermediate Agent
- DHCPv6 Snooping
- IPv6 Source Guard
- IPv6 ND Inspection
- IPv6 RA Guard

Access control lists (ACL)

- L2-L3-L4 ACL (Access Control List)
- IPv6 ACL
- ACL based on:
 - Switch port
 - IEEE 802.1p
 - VLAN ID
 - EtherType
 - DSCP
 - IP protocol type
 - TCP/UDP port number
 - User Defined Bytes

Quality of Service (QoS) and rate limiting

- Port rate limiting (shaping, policing)
- Support for IEEE 802.1p Class of Service
- Strict Priority/Weighted Round Robin (WRR) scheduling algorithms
- ACL-based traffic classification
- ACL-based CoS/DSCP marking
- DSCP to CoS remarking
- CoS to DSCP remarking
- ACL-based VLAN assignment

OAM

- IEEE 802.3ah, Ethernet OAM
- IEEE 802.3ah Unidirectional Link Detection (UDLD)

Main management functions

- Configuration file download and upload via TFTP/SFTP
- Automated backup of configuration file via TFTP/SFTP
- Simple Network Management Protocol (SNMP)
- Command Line Interface (CLI)
- Web interface
- Syslog
- SNTP (Simple Network Time Protocol)
- Traceroute

- LLDP (IEEE 802.1ab) + LLDP MED
- Two 802.1Q headers traffic control
- Commands authorization using TACACS+ server
- IPv4/IPv6 ACL support for device control
- Switch access management – privilege levels for users
- Management interface blocking
- Local authentication
- IP addresses filtering for SNMP
- RADIUS and TACACS+ (Terminal Access Controller Access Control System) clients
- Telnet client, SSH client
- Telnet server, SSH server
- Macro commands
- Input commands logging via TACACS+ protocol
- DHCP autoprovision
- DHCP Relay (IPv4 support)
- DHCP Relay Option 82
- DHCP server¹
- PPPoE Circuit-ID tag adding
- Flash File System
- Debug commands
- Rate limit of traffic to CPU
- Password encryption
- Ping (IPv4/IPv6 support)
- IPv4/IPv6 static routing
- Support for several versions of configuration file

Monitoring functions

- Interface statistics
- CPU utilization monitoring per task and per queue
- RAM usage monitoring
- Temperature monitoring
- TCAM monitoring

MIB/IETF


- RFC 1065, 1066, 1155, 1156, 2578 MIB Structure
- RFC 1212 Concise MIB Definitions
- RFC 1213 MIB II
- RFC 1215 MIB Traps Convention
- RFC 1493, 4188 Bridge MIB
- RFC 1157, 2571-2576 SNMP MIB
- RFC 1901-1908, 3418, 3636, 1442, 2578 SNMPv2 MIB
- RFC 2465 IPv6 MIB
- RFC 2737 Entity MIB
- RFC 4293 IPv6 SNMP Mgmt Interface MIB
- Private MIB
- RFC 1398, 1643, 1650, 2358, 2665, 3635 Ether-like MIB
- RFC 2668 802.3 MAU MIB
- RFC 2674, 4363 802.1p MIB
- RFC 2233, 2863 IF MIB
- RFC 2618 RADIUS Authentication Client MIB
- RFC 4022 MIB for TCP
- RFC 4113 MIB for UDP
- RFC 3289 MIB for Diffserv
- RFC 2620 RADIUS Accounting Client MIB
- RFC 768 UDP

¹ Only for MES2424P, MES2448P, MES2420-48P.

Features and capabilities (continued)

- RFC 791 IP
- RFC 792 ICMPv4
- RFC 2463, 4443 ICMPv6
- RFC 793 TCP
- RFC 2474, 3260 Definition of the DS field in the IPv4 and IPv6 Headers
- RFC 1321, 2284, 2865, 3580, 3748 Extensible Authentication Protocol (EAP)
- RFC 2571, RFC 2572, RFC 2573, RFC 2574 SNMP
- RFC 826 ARP
- RFC 854 Telnet
- IEC 61850

Use case

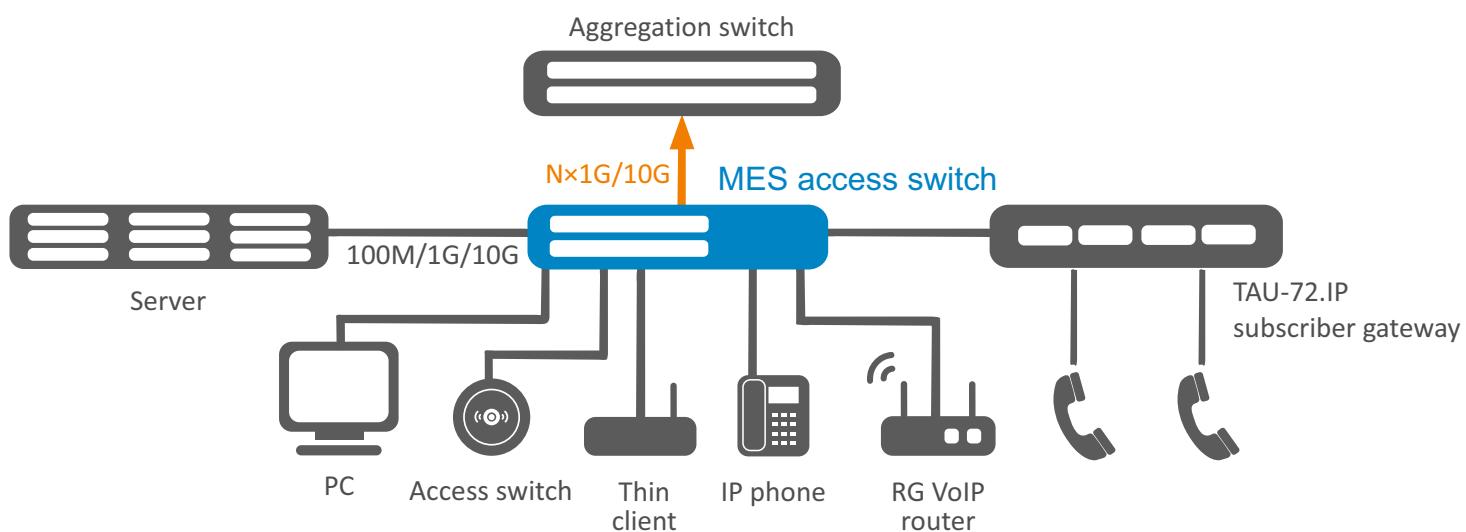

Physical parameters

| | MES2408CP | MES2408P ^{CE} | MES2408PL | MES2428P ^{CE} AC | MES2428P ^{CE} DC | MES2424P ^{CE} | MES2448P | MES2420-48P |
|--|---------------------------|--|---------------------------|------------------------------|------------------------------|---------------------------|---|---|
| Physical specifications and environmental parameters | | | | | | | | |
| Power | 110–250 V AC, 50–60 Hz | 176–250 V AC, 50–60 Hz or 36–72 V DC | 110–250 V AC, 50–60 Hz | 176–264 V AC, 50–60 Hz | 36–72 V DC | 176–264 V AC, 50–60 Hz | 176–264 V AC, 50–60 Hz (up to 2 hot-swappable power supplies) | 100–240 V AC, 50–60 Hz 36–72 V DC (up to 2 hot-swappable power supplies) |
| Input current | 1.4 A–0.6 A | 1.6 A–1.1 A 7.8 A–3.9 A | 0.8 A–0.4A | 2.4 A–1.6A | 12.5 A–6.3 A | 2.4 A–1.6 A | 4.7 A–3.2 A | 10 A–5 A |
| Maximum power consumption (including PoE) | 150 W | 275 W AC 280 W DC | 80 W | 420 W | 450 W | 420 W | 820 W | 1600 W |
| PoE budget | 120 W | 240 W | 65 W | 370 W | 370 W | 370 W | 720 W | 1450 W |
| Heat dissipation | 30 W | 35 W AC 40 W DC | 15 W | 50 W | 80 W | 50 W | 100 W | 160 W |
| Hardware support for Dying Gasp | yes | no | no | yes | no | yes | no | no |
| Operating temperature ¹ | from -20 °C to +50 °C | from -20 °C to +50 °C | from -20 °C to +50 °C | from -20 °C to +50 °C | from -20 °C to +50 °C | from -20 °C to +50 °C | from -10 °C to +50 °C | from -10 °C to +50 °C |
| Storage temperature | from -40 °C to +70 °C | | | | | | | |
| Cooling | passive | passive | passive | 2 fans | 2 fans | 2 fans | 4 fans | 4 fans |
| Operating humidity | no more than 80 % | | | | | | | |
| Form factor | 19", 1U | | | | | | | |
| Dimensions (W × H × D), mm | 310 × 44 × 177 | 430 × 44 × 178 | 310 × 44 × 177 | 430 × 44 × 204 | 430 × 44 × 305 | 430 × 44 × 225 | 440 × 44 × 447 | 440 × 44 × 490 |
| Weight | 2.16 kg | 2.69 kg | 1.9 kg | 3.27 kg | 3.27 kg | 3.36 kg | 7.46 kg | 9.55 kg |

¹For MES2408CP and MES2408P DC: when operating devices at temperatures above 45 °C it is necessary to use industrial SFP transceivers.
 CE — the device complies with CE requirements.

Ordering information

| Name | Description |
|--------------------|---|
| MES2408CP | Ethernet switch MES2408CP, 8 ports of 10/100/1000BASE-T (PoE/PoE+), 2 Combo ports of 10/100/1000BASE-T/100BASE-FX/1000BASE-X, L2, 110–250 V AC |
| MES2408P AC | Ethernet switch MES2408P AC, 8 ports of 10/100/1000BASE-T (PoE/PoE+), 2 ports of 100BASE-FX/1000BASE-X, L2, 176–250 V AC |
| MES2408P DC | Ethernet switch MES2408P DC, 8 ports of 10/100/1000BASE-T (PoE/PoE+), 2 ports of 100BASE-FX/1000BASE-X, L2, 36–72 V DC |
| MES2408PL | Ethernet switch MES2408PL, 8 ports of 10/100/1000BASE-T (PoE/PoE+), 2 ports of 100BASE-FX/1000BASE-X, L2, 110–250 V AC |
| MES2428P AC | Ethernet switch MES2428P AC, 24 ports of 10/100/1000BASE-T (PoE/PoE+), 4 Combo ports of 10/100/1000BASE-T/100BASE-FX/1000BASE-X, L2, 176–264 V AC |
| MES2428P DC | Ethernet switch MES2428P DC, 24 ports of 10/100/1000BASE-T (PoE/PoE+), 4 Combo ports of 10/100/1000BASE-T/100BASE-FX/1000BASE-X, L2, 36–72 V DC |
| MES2424P | Ethernet switch MES2424P, 24 ports of 10/100/1000BASE-T (PoE/PoE+), 4 ports of 1000BASE-X/10GBASE-R, L3, 176–264 V AC |
| MES2448P | Ethernet switch MES2448P, 48 ports of 10/100/1000BASE-T (PoE/PoE+), 4 ports of 1000BASE-X/10GBASE-R, L3 |
| MES2420-48P | Ethernet switch MES2420-48P, 48 ports of 10/100/1000BASE-T (PoE/PoE+), 4 ports of 1000BASE-X/10GBASE-R, L3 |

Related products

| | |
|---------------------|---|
| PM380-220/56 | Power module PM380-220/56, 176–264 V AC, 380 W, for MES2448P switches |
|---------------------|---|

Related software

| | |
|-------------------------|---|
| ECCM-MES2408CP | ECCM-MES2408CP option of Eltex ECCM management system for ELTEX network elements management and monitoring: 1 network element MES2408CP |
| ECCM-MES2408P | ECCM-MES2408P option of Eltex ECCM management system for ELTEX network elements management and monitoring: 1 network element MES2408P |
| ECCM-MES2408P_DC | ECCM-MES2408P_DC option of Eltex ECCM management system for ELTEX network elements management and monitoring: 1 network element MES2408P DC |
| ECCM-MES2408PL | ECCM-MES2408PL option of Eltex ECCM management system for ELTEX network elements management and monitoring: 1 network element MES2408PL |
| ECCM-MES2428P_AC | ECCM-MES2428P_AC option of Eltex ECCM management system for ELTEX network elements management and monitoring: 1 network element MES2428P AC |
| ECCM-MES2428P_DC | ECCM-MES2428P_DC option of Eltex ECCM management system for ELTEX network elements management and monitoring: 1 network element MES2428P DC |
| ECCM-MES2424P | ECCM-MES2424P option of Eltex ECCM management system for ELTEX network elements management and monitoring: 1 network element MES2424P |
| ECCM-MES2448P | ECCM-MES2448P option of Eltex ECCM management system for ELTEX network elements management and monitoring: 1 network element MES2448P |
| ECCM-MES2420-48P | ECCM-MES2420-48P option of Eltex ECCM management system for ELTEX network elements management and monitoring: 1 network element MES2420-48P |

Contact us

 +7 (383) 274 10 01
 +7 (383) 274 48 48

 eltex@eltex-co.ru

 www.eltex-co.com

About ELTEX

ELTEX Enterprise is a leading Russian developer and manufacturer of communications equipment with 30 years of history. Complete solutions and their seamless integrability into Customer's infrastructure are the priority growth areas of the company.