

- Data routing
- Flexible service configuration
- Hardware acceleration of data processing
- Multi-protocol Label Switching (MPLS)
- Construction of secure network perimeter (NAT, Firewall)
- Intrusion prevention and detection (IPS/IDS)
- Service quality monitoring (SLA)
- Filtering of network data by various criteria (including filtering by applications)
- Organization of secure network tunnels between different offices of a company
- Remote connection of staff members to office
- Management and distribution of Internet channel width within an office by using QoS
- Organization of redundant connection (by means of wires or 3G/LTE modem)
- Subscriber termination and bandwidth limiting — BRAS (IPoE)
- Possibility to operate with the equipment of leading manufacturers

The **ESR-3100**, **ESR-3200**, **ESR-3200L**, **ESR-3300** service routers are universal hardware platforms capable of performing a wide range of tasks related to network security, data encryption, subscriber termination, etc.

The product line includes models that can be used in networks of various sizes, from enterprise networks to service provider networks and data centers.


The key features of the series are hardware and software data processing means. Data processing functions are distributed among the units of the device that ensures a high level of performance.



ESR-3100



ESR-3200

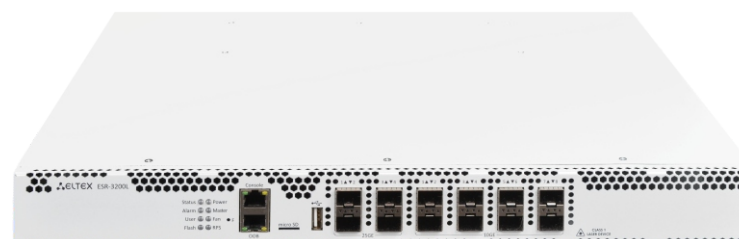

ESR-3200L



ESR-3300

Technical features

	ESR-3100	ESR-3200	ESR-3200L	ESR-3300
	Interfaces			
Ethernet 10/100/1000BASE-T (RJ-45)	8	—	—	—
1000BASE-X/10GBASE-R/25GBASE-R	—	12	4	4
10GBASE-R (SFP+)/1000BASE-X (SFP)	8	—	8	—
40GBASE-R (QSFP+)/100GBASE-R (QSFP28)	—	—	—	4
Console RS-232 (RJ-45)	1	1	1	1
OOB	—	1	1	1
USB 2.0	—	1	1	—
USB 3.0	2	—	—	1
SD card slot	1	—	—	—
microSD card slot	—	1	1	1

Functionality for firmware version 1.28.

Technical features

	ESR-3100	ESR-3200	ESR-3200L	ESR-3300
	Performance			
Firewall/routing (1518B frames)	25.1 Gbps; 2069.7k pps	48.4 Gbps; 3900.5k pps	22 Gbps; 1811.4k pps	74.8 Gbps; 6160.7k pps
Firewall/routing (IMIX) ¹	10.4 Gbps; 1885.7k pps	22 Gbps; 3990.2k pps	9.9 Gbps; 1801k pps	33.9 Gbps; 6141.8k pps
L2 switching (1518B frames)	35.9 Gbps; 2958.4k pps	28.7 Gbps; 2363.1k pps	14.5 Gbps; 1196.8k pps	36.9 Gbps; 3039.3k pps
IPsec VPN (1456B frames)*	3.2 Gbps; 272.5k pps	7 Gbps; 606.8k pps	1.6 Gbps; 141k pps	2.7 Gbps; 229.3k pps
IPsec (IMIX) ² *	1.7 Gbps; 309.4k pps	3.6 Gbps; 686.8k pps	863.9 Mbps; 161.9k pps	1.4 Gbps; 258.5k pps
1 IPsec tunnel (1456B frames)*	282 Mbps; 24.2k pps	1.2 Gbps; 104.3k pps	320.7 Mbps; 27.5k pps	353.9 Mbps; 30.4k pps
1 IPsec tunnel (IMIX)*	148 Mbps; 27.7k pps	641 Mbps; 87.6k pps	169.6 Mbps; 31.7k pps	187.2 Mbps; 35.1k pps
IPS/IDS 10k rules	1.15 Gbps; 237.9k pps	2 Gbps; 364.3k pps	729 Mbps; 135.6k pps	2.6 Gbps; 477.8k pps
MPLS L2VPN switching (IMIX)	1.5 Gbps; 267.6k pps	–	1.4 Gbps; 267.6k pps	1.6 Gbps; 286.5k pps
MPLS L3VPN switching (IMIX)	668 Mbps; 122.2k pps	–	915.9 Mbps; 167.1k pps	1 Gbps; 184.5k pps

Functionality for firmware version 1.28.

¹Traffic format (number per second : size of each frame) – 8:74; 5:512; 7:1518.

²Traffic format (number per second : size of each frame) – 8:74; 5:512; 7:1456.

*Measured using the authentication algorithm MD5 and the encryption algorithm AES128.

Technical features (continued)

	ESR-3100	ESR-3200	ESR-3200L	ESR-3300
	Number of CPUs by role			
Management CPU	0			
Balancing CPU	15–17	–	–	–
Service CPU	2–14, 18–23	1–23	1–11	1–35
	Switching			
Interfaces	bridge – 500 sub – 2048 QinQ – 2048			
LLDP	interfaces port policies – 8 network policies – 64			
	Label switching			
MPLS	LDP neighbors – 1024 pseudowires – 1024 pseudowire classes – 64 Ethernet over MPLS – 256			
	System features			
Static routes	11k			
Maximum number of concurrent sessions	8.5M			
VLAN support	up to 4094 active VLANs in accordance with 802.1Q			
FIB size	1.7M			
VRF	32			
PBR	instances – 50 rules for all instances – 512			

Functionality for firmware version 1.28.

Technical features (continued)

	ESR-3100	ESR-3200	ESR-3200L	ESR-3300
	Object-groups			
Object-group network	instances – 500 ip prefixes in group – 1024 ip ranges in group – 1024			
Object-group address:port	instances – 500 address:port in group – 64			
Object-group service	instances – 500 ports ranges in group – 64			
Object-group application	instances – 50 apps in group – 128			
Object-group content filter	instances – 64 categories per vendor – 500			
Object-group URL	instances – 31 plain URL in group – 32 regex URL in group – 32			
Object-group MAC	instances – 500 macs in group – 64			

Technical features (continued)

	ESR-3100	ESR-3200	ESR-3200L	ESR-3300
	Routing			
BGP			instances – 64 networks in instance – 128 neighbors – 1k RIB – 5M	
OSFPv3			instance, neighbors in interface – 64 summaries in instance – 128 areas – 256 networks in area – 64 virtual links – 1024 RIB – 500k	
IS-IS			instances, circuits – 64 RIB – 500k	
RIP(ng)			neighbors – 16 summaries – 8 networks – 128 RIB – 10k	
	Quality of Service (QoS)			
QoS limitations			class-maps – 1024 policy-maps – 1024 classes in policy-map – 3072	
	Tunneling			
VPN tunnels			IPIP – 500 GRE – 500 Ethernet over GRE – 500 GRE SUB – 500 SoftGRE – 4000 L2TPv3 – 500 LT – 128 IPsec VTI – 500	
IPsec VPN tunnels			256	

Functionality for firmware version 1.28.

Technical features (continued)

	ESR-3100	ESR-3200	ESR-3200L	ESR-3300
	Remote access			
Remote Access		L2TP tunnels (client) – 10 PPTP tunnels (client) – 10 OpenVPN tunnels (client) – 10 OpenVPN remote addresses per tunnel – 8		
WireGuard tunnel, RA		instance – 16 peers per instance – 256 local addresses – 1 addresses per peer (address-range & obj-group) – 10k		
	Services			
Source NAT		ruleset – 1024 rules in ruleset – 1024 pool – 1024		
Destination NAT		ruleset – 1024 rules in ruleset – 1024 pool – 1024		
DHCP Server		pools – 100 pool size – 10k static address in pool – 128		
	Security			
ACL		instances – 1533 rules – 1533		
Firewall		zone – 128 zone-pair – 512 rules – 10k		
IPS		user update servers – 32 ips-categories – 20 rules – 500		
	IKE (v1/v2), IPsec (esp/ah) encryption algorithms			
Authentication		md5, sha1, sha2-256, sha2-384, sha2-512		
Encryption		des, blowfish128, aes128, camellia128, aes128ctr (IKEv2 only), blowfish192, aes192, camellia192, 3des, aes192ctr (IKEv2 only), blowfish256, aes256, camellia256, aes256ctr (IKEv2 only)		
Diffie Hellman		Regular Groups: 1,2,5,14-18. Modulo Prime Groups with Prime Order Subgroup: 22-24. NIST Elliptic Curve Groups: 19-21, 25-26. Brainpool Elliptic Curve Groups: 27-30. Elliptic Curve 25519: 31		

Functionality for firmware version 1.28.

Physical specifications

	ESR-3100	ESR-3200	ESR-3200L	ESR-3300
	Physical specifications and environmental parameters			
RAM	16 GB DDR4	24 GB DDR4	16 GB DDR4	32 GB DDR4
Flash memory	4 GB eMMC	8 GB eMMC	8 GB eMMC	8 GB eMMC
Maximum power consumption	123 W	118 W	105.3 W	177 W
Power supply	100–240 V AC, 50–60 Hz; 36–72 V DC up to two hot-swappable modules			
Operating temperature	from -10 to +45 °C			
Storage temperature	from -40 to +70 °C			
Operating humidity	no more than 80 %			
Storage humidity	from 10 to 95 %			
Dimensions (W × H × D)	430 × 44 × 330 mm	430 × 44 × 330 mm	430 × 44 × 330 mm	440 × 44 × 425 mm
Weight	4.34 kg	5 kg	5 kg	6 kg
Lifetime	no less than 15 years			

Features and capabilities

Switching

- Up to 4094 VLAN (802.1Q)
- Voice-VLAN
- Q-in-Q (802.1ad)
- MAC-based VLAN
- Bridge domain
- LAG/LACP (802.3ad)
- Port-security, protected port
- Jumbo frames

MPLS

- LDP
- L2VPN VPWS
- L2VPN VPLS Martini Mode, Kompella Mode

- L3VPN MP-BGP (Option A, B, C)
- L2VPN/L3VPN over GRE, DMVPN
- Transparent transfer of service protocols

Routing

BGP:

- Address family: IPv4, IPv6, VPNv4, L2VPN, IPv4 label-unicast, Flow-spec
- Flexible management of route information by attributes. Support for Conditional Advertisement, Route Aggregation and Local-AS mechanisms
- Scalability and configuration flexibility: support for peer-group, dynamic neighbor, as-range, Route-reflector

- Fall over based on BFD and Fast Error Peer Detection
- Graceful restart
- Authentication
- Flexible redistribution from/to BGP process of other protocol routes
- Ability to run up to 64 processes simultaneously
- ECMP
- Support for policy-based routing

Features and capabilities (continued)

OSFP(v3):

- Different types of zones: Normal, Stub, Totally stub, NSSA, Totally NSS
- Operation in different types of networks: Broadcast, NBMA, Point-to-point, Point-to-multipoint, Point-to-multipoint non-broadcast
- Summarization and filtering of route information
- Authentication
- ECMP
- Passive interface
- Flexible redistribution from/to OSPF process of other protocol routes
- Ability to run up to 64 processes simultaneously
- Support for BFD
- Auto cost calculation mechanism
- Support for policy-based routing

IS-IS:

- Operation in different types of networks: Broadcast, Point-to-point
- Setting the neighbourhood of L1/L2 layers
- Metric style: narrow, wide, transition
- Authentication
- Filtering of route information
- Flexible redistribution from/to IS-IS process of other protocol routes
- Ability to run up to 64 processes simultaneously
- Support for policy-based routing

RIP(ng):

- Operation modes (RIP only): Broadcast, Multicast, Unicast
- Summarization and filtering of route information
- Managing route metrics
- Authentication

- Passive interface
- Flexible redistribution from/to RIP process of other protocol routes
- Support for policy-based routing

Static:

- Support for BFD
- Recursive search
- Managing route metrics
- Ability to select the option of notifying the sender when traffic is blocked

Quality of Service (QoS)

- Up to 8 priority or weighted queues per port
- L2 and L3 traffic prioritization (802.1p (CoS), DSCP, IP Precedence (ToS))
- Hierarchical QoS
- Queue management: RED, GRED, SFQ, CBQ, WFQ, WRR
- Session labeling
- Bandwidth management (policing, shaping)

IPsec

- «Policy-based» and «route-based» modes
- Incapsulation modes: tunnel and transport
- Authentication pre-shared key, public key, xauth (ikev1 only), eap (ikev2)
- Support for mobike (ikev2 only)
- Support for ike ikering

Remote Access

- PPTP, L2TP over IPsec, OpenVPN, WireGuard
- PPPoE-/PPTP-/L2TP client
- User authentication
- Connection encryption

Security

- Access Control Lists (ACL) based on L2-/L3-/L4 fields
- Zone-based Firewall in two modes: stateful and stateless. Rule triggering logging, counters
- Filtering by applications
- Protection against DoS-/DDoS-/Spoof attacks and their logging
- Intrusion detection and prevention systems (IPS/IDS) and their logging¹
- Signature analysis via IPS in two modes: transit and mirrored traffic analysis¹
- Interaction with Eltex Distribution Manager to obtain licensed content — rule sets provided by Kaspersky SafeStream II²

Monitoring and management

- Support for standard and extended SNMP MIB, RMONv1
- Zabbix agent/proxy
- Authentication methods: RADIUS, TACACS+, LDAP
- Protection against configuration errors, automatic configuration recovery
- CLI, Syslog
- System resource usage monitoring
- Ping, monitor, traceroute (IPv4/IPv6), packet information in the console output
- Firmware upgrade, configuration upload and download via TFTP, SCP, FTP, SFTP, HTTP(S)
- Support for NTP
- Netflow v5/v9/v10 (exporting of URL statistics for HTTP, host for HTTPS)
- Local control via RS-232 (RJ-45) and OOB³
- Remote control via Telnet and SSH (IPv4/IPv6)
- LLDP, LLDP MED
- Local/remote router configuration storage

Functionality for firmware version 1.28.

¹Available under license.

²Rule sets are available by subscription. The minimum subscription period is 1 year.

³Applicable for ESR-3200/3200L/3300.

Features and capabilities (continued)

SLA

- SLA-responder for Cisco-SLA-agent
- Eltex SLA:
 - Delay (one-way/two-way)
 - Jitter (one-way/two-way)
 - Packet loss (one-way/backward/two-way)
 - Packet Error Rate
 - Out-of-order delivery (one-way/backward/two-way)

Redundancy and clustering

- VRRP v2, v3
- Tracking based on VRRP or SLA test
- Managing VRRP parameters
- Managing PBR parameters
- Managing the administrative status of the interface
- Activating and deactivating a static route
- Managing AS-PATH and preference attributes in a route-map

- DHCP failover to reserve the IP address database issued by the DHCP server
- Firewall failover to reserve Firewall and NAT sessions
- MultiWAN
- Dual-Homing

High availability cluster:

- Easy administration and integration: synchronization of configurations, time, versions, licences; Zero Touch Provisioning (ZTP)
- Redundancy of all connections in the cluster
- Router redundancy (the current version supports “1 + 1” redundancy)

Services


- DHCP client, DHCP server
- DHCP Relay Option 82
- DNS resolver

- NTP
- TFTP server
- E1/multilink, modems

BRAS¹

- Subscriber termination
- White/black URL lists
- Quotas for traffic volume, session time, network applications
- HTTP/HTTPS Proxy
- HTTP/HTTPS Redirect
- Session accounting via Netflow protocol
- Interaction with AAA, PCRF servers
- Bandwidth management by offices, SSIDs and user sessions
- User authentication by MAC or IP address

Use case

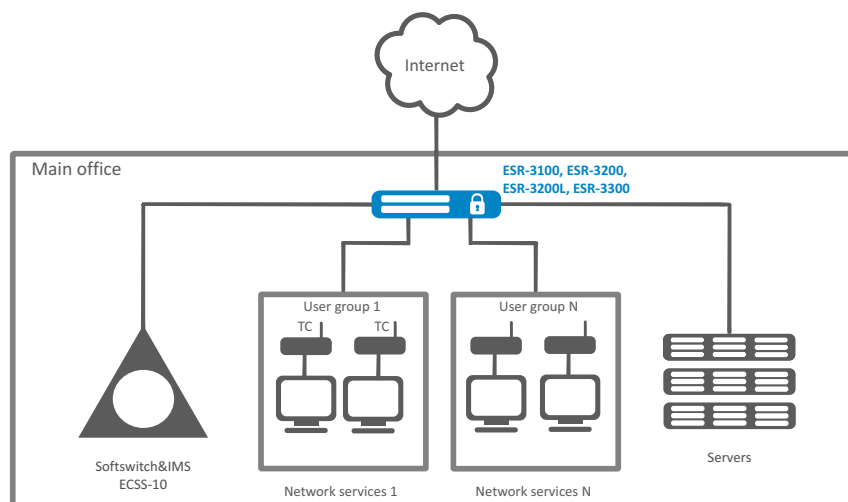

Functionality for firmware version 1.28.

¹Available under license.

Ordering information

Name	Description
ESR-3100	ESR-3100 service router, 8 × 10/100/1000BASE-T, 8 × 10GBASE-R SFP+, 1 × Console RS-232 (RJ-45), 2 × USB 3.0, 1 × SD card slot, 16 GB DDR4 RAM, 4 GB eMMC, 2 × 100–240 V AC or 36–72 V DC power modules slots.
ESR-3200	ESR-3200 service router, 12 × Ethernet 1000BASE-X/10GBASE-R/25GBASE-R, 1 × Console RS-232 (RJ-45), 1 × OOB, 1 × USB 2.0, 1 × microSD card slot, 24 GB DDR4 RAM, 8 GB eMMC, 2 × 100–240 V AC or 36–72 V DC power modules slots.
ESR-3200L	ESR-3200L service router, 4 × Ethernet 1000BASE-X/10GBASE-R/25GBASE-R, 8 × 10GBASE-R SFP+/1000BASE-X SFP, 1 × Console RS-232 (RJ-45), 1 × OOB, 1 × USB 2.0, 1 × microSD card slot, 16 GB DDR4 RAM, 8 GB eMMC, 2 × 100–240 V AC or 36–72 V DC power modules slots.
ESR-3300	ESR-3300 service router, 4 × Ethernet 1000BASE-X/10GBASE-R/25GBASE-R, 4 × 40GBASE-R (QSFP+)/100GBASE-R (QSFP28), 1 × Console RS-232 (RJ-45), 1 × OOB, 1 × USB 3.0, 1 × microSD card, 32 GB DDR4 RAM, 8 GB eMMC, 2 × 100–240 V AC or 36–72 V DC power modules slots.

Related software

ESR-3100	ECCM-ESR-3100 option of Eltex ECCM management system for management and monitoring of Eltex network element: ESR-3100
ESR-3200	ECCM-ESR-3200 option of Eltex ECCM management system for management and monitoring of Eltex network element: ESR-3200
ESR-3200L	ECCM-ESR-3200L option of Eltex ECCM management system for management and monitoring of Eltex network element: ESR-3300L
ESR-3300	ECCM-ESR-3300 option of Eltex ECCM management system for management and monitoring of Eltex network element: ESR-3300

Power modules¹

Device	AC power module	DC power module
ESR-3100	PM160-220/12	PM160-48/12
ESR-3200	PM160-220/12	PM160-48/12
ESR-3200L	PM160-220/12	PM160-48/12
ESR-3300	PM600-220/12	PM600-48/12

¹ On request.

Contact us



+7 (383) 274 10 01
+7 (383) 274 48 48



eltex@eltex-co.ru



www.eltex-co.com

About ELTEX

Eltex Enterprise is a leading Russian developer and manufacturer of communication equipment with 30 years of history. Complete solutions and their seamless integrability into the Customer's infrastructure are the priority growth areas of the company.