


- Throughput capacity 176 Gbps
- Non-blocking switching fabric
- L3 functions
- Stacking of up to 8 devices
- Multicast support (IGMP Snooping, MVR)
- Advanced security functions (L2-L4 ACL, IP Source Guard, Dynamic ARP Inspection, etc.)

The switches are designed to connect end users to large-scale corporate networks, small and medium business networks and to service provider networks using 1G/10G Ethernet interfaces.

The switches support physical stacking, VLANs, multicast groups and advanced security functions.

The switches comply with CE requirements.

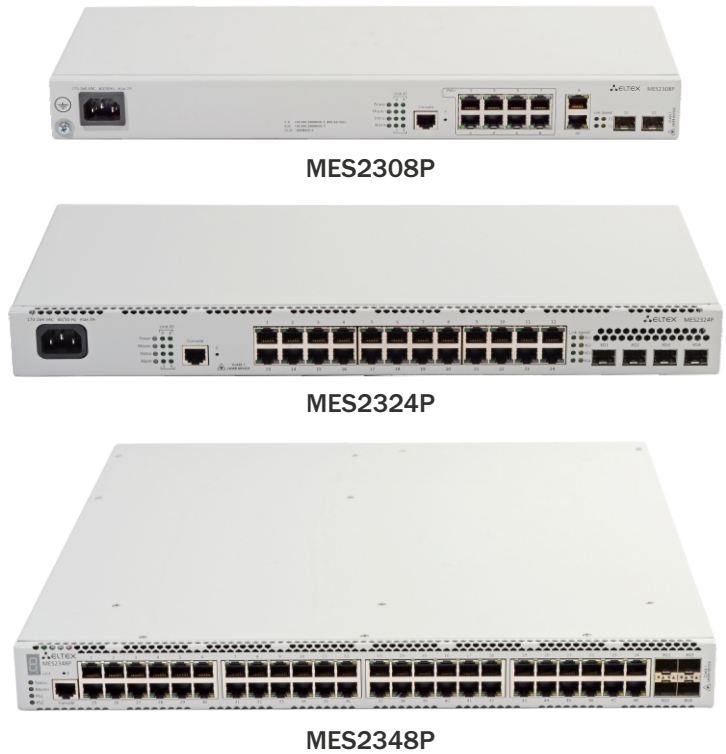

## Technical features

|                                      | MES2308P<br>AC       | MES2308P<br>DC | MES2324P<br>AC | MES2324P<br>ACW | MES2324P<br>DC | MES2348P   |
|--------------------------------------|----------------------|----------------|----------------|-----------------|----------------|------------|
| Interfaces                           |                      |                |                |                 |                |            |
| 10/100/1000BASE-T (RJ-45) PoE/PoE+   | 8                    | 8              | 24             | 24              | 24             | 48         |
| 10/100/1000BASE-T (RJ-45)            | 2                    | 2              | —              | —               | —              | —          |
| 1000BASE-X (SFP)                     | 2                    | 2              | —              | —               | —              | —          |
| 10GBASE-R (SFP+)/1000BASE-X (SFP)    | —                    | —              | 4              | 4               | 4              | 4          |
| Console port RS-232 (RJ-45)          | 1                    |                |                |                 |                |            |
| Performance                          |                      |                |                |                 |                |            |
| Bandwidth                            | 24 Gbps              | 24 Gbps        | 128 Gbps       | 128 Gbps        | 128 Gbps       | 176 Gbps   |
| Throughput for 64 bytes <sup>1</sup> | 17.7 MPPS            | 17.7 MPPS      | 93.1 MPPS      | 93.1 MPPS       | 93.1 MPPS      | 130.9 MPPS |
| Buffer memory                        | 1.5 MB               | 1.5 MB         | 1.5 MB         | 1.5 MB          | 1.5 MB         | 3 MB       |
| RAM (DDR3)                           | 512 MB               |                |                |                 |                |            |
| ROM (RAW NAND)                       | 512 MB               |                |                |                 |                |            |
| MAC table                            | 16384                |                |                |                 |                |            |
| ARP table <sup>2</sup>               | 820                  |                |                |                 |                |            |
| VLAN table                           | 4094                 |                |                |                 |                |            |
| L2 Multicast groups                  | 2047                 |                |                |                 |                |            |
| SQinQ rules                          | 958 (ingress/egress) |                |                |                 |                |            |
| ACL rules                            | 958                  |                |                |                 |                |            |

<sup>1</sup> Values are given for 1-way transmission.

<sup>2</sup> For each host in the ARP table, an entry is created in the routing table.

## Technical features (continued)

|                                                         | MES2308P<br>AC | MES2308P<br>DC | MES2324P<br>AC             | MES2324P<br>ACW | MES2324P<br>DC | MES2348P |
|---------------------------------------------------------|----------------|----------------|----------------------------|-----------------|----------------|----------|
| L3 IPv4 Unicast routes <sup>1</sup>                     |                |                |                            | 816             |                |          |
| L3 IPv6 Unicast routes <sup>1</sup>                     |                |                |                            | 210             |                |          |
| L3 IPv4 Multicast routes (IGMP Proxy, PIM) <sup>1</sup> |                |                |                            | 412             |                |          |
| L3 IPv6 Multicast routes (IGMP Proxy, PIM) <sup>1</sup> |                |                |                            | 103             |                |          |
| VRRP routers                                            |                |                |                            | 255             |                |          |
| Maximum size of ECMP groups                             |                |                |                            | 8               |                |          |
| VRF                                                     |                |                | 16 (including default VRF) |                 |                |          |
| L3 interfaces                                           |                |                | 130                        |                 |                |          |
| Link Aggregation Groups (LAG)                           |                |                | 48, up to 8 ports per LAG  |                 |                |          |
| Quality of Service (QoS)                                |                |                | 8 egress queues per port   |                 |                |          |
| Jumbo frames size                                       |                |                | 10240 bytes                |                 |                |          |
| Stacking                                                |                |                | 8 devices                  |                 |                |          |

## Features and capabilities

### Interfaces functions

- Head-of-line blocking (HOL) protection
- Back Pressure
- Auto MDI/MDIX
- Jumbo Frames
- Flow control (IEEE 802.3X)
- Port Mirroring (SPAN, RSPAN)

### MAC table functions

- Independent learning mode per VLAN
- MAC Multicast Support
- Configurable aging time of MAC addresses
- Static MAC Entries
- MAC Flapping logging

### VLAN functions

- Voice VLAN
- 802.1Q
- Q-in-Q
- Selective Q-in-Q
- GVRP

### L2 Multicast functions

- Multicast profiles
- Static Multicast groups
- IGMP Snooping v1,2,3
- Port/host-based IGMP Snooping Fast Leave
- PIM Snooping
- IGMP proxy-report
- IGMP authorization via RADIUS
- MLD Snooping v1,2
- IGMP Querier
- MVR

### L2 functions

- STP (Spanning Tree Protocol, IEEE 802.1d)
- RSTP (Rapid Spanning Tree Protocol, IEEE 802.1w)
- MSTP (Multiple Spanning Tree Protocol, IEEE 802.1s)
- STP Multiprocess
- PVSTP+
- RPVSTP+

- Spanning Tree Fast Link option
- STP Root Guard
- STP Loop Guard
- BPDU Filtering
- STP BPDU Guard
- VLAN-based Loopback Detection (LBD)
- ERPS (G.8032v2)
- Flex-link
- Private VLAN, Private VLAN Trunk
- Layer 2 Protocol Tunneling (L2PT)

### L3 functions

- Static IP routes
- Dynamic routing protocols RIPv2, OSPFv2, OSPFv3, IS-IS, BGP<sup>2</sup> (IPv4 Unicast, IPv4 Multicast, IPv6 Unicast)
- BFD (for BGP, OSPF)
- Address Resolution Protocol (ARP)
- Proxy ARP
- Policy-Based Routing (IPv4)
- VRRP
- PIM SM, PIM DM, IGMP Proxy, MSDP
- ECMP Load Balancing
- IP Unnumbered
- VRF Lite

### Link Aggregation functions

- Static LAG
- Dynamic LAG (LACP)
- LAG Balancing Algorithm
- Multi-Switch Link Aggregation Group (MLAG)

### IPv6 functions

- IPv6 Host
- Dual-stack

### Service functions

- Virtual Cable Testing (VCT)
- Optical transceiver diagnostics
- Green Ethernet

<sup>1</sup> IPv4/IPv6 Unicast/Multicast routes share hardware resources.

<sup>2</sup> BGP protocol support is provided under license.

## Features and capabilities (continued)

### Security functions

- Protection against unauthorized DHCP servers (DHCP Snooping)
- DHCP Option 82
- IP Source Guard
- Dynamic ARP Inspection
- First Hop Security
- sFlow
- MAC-based authentication, Port Security, Static MAC entries
- Port-based authentication IEEE 802.1x
- Guest VLAN
- DoS attack prevention
- Traffic segmentation
- DHCP clients filtering
- BPDU attacks prevention
- NetBIOS/NetBEUI filtering
- PPPoE Intermediate Agent

### ACL (Access Control Lists)

- L2-L3-L4 ACL
- Time-Based ACL
- IPv6 ACL
- ACL based on:
  - Physical port number
  - IEEE 802.1p
  - VLAN ID
  - EtherType
  - DSCP
  - Protocol type
  - TCP/UDP port number
  - User Defined Bytes

### Quality of Service (QoS) and rate limiting

- QoS statistics
- Shaping, Policing
- IEEE 802.1p Class of Service (CoS)
- Storm Control for different types of traffic (broadcast, multicast, unknown unicast)
- Bandwidth management
- Scheduling algorithms: Strict Priority/Weighted Round Robin (WRR)
- Three marking colors
- ACL-based CoS/DSCP mark assignment
- Setting the IEEE 802.1p priority for management VLAN
- DSCP to CoS/CoS to DSCP remarking
- ACL-based VLAN assignment
- 802.1p, DSCP mark assignment for IGMP

### OAM/CFM

- IEEE 802.3ah Ethernet OAM
- IEEE 802.1ag Connectivity Fault Management (CFM)
- IEEE 802.3ah Unidirectional Link Detection (UDLD)

### Management functions

- Download and upload of configuration file via TFTP/SCP/SFTP/FTP
- Redirecting the output of CLI commands to an arbitrary file on ROM
- SNMP
- Command Line Interface (CLI)
- Web interface
- Syslog
- SNTP (Simple Network Time Protocol) client
- NTP (Network Time Protocol) client, NTP server, NTP peer
- Traceroute
- LLDP (802.1ab) + LLDP MED
- Access control – privilege levels
- Management interface blocking
- Local authentication
- IP addresses filtering for SNMP
- RADIUS and TACACS+ (Terminal Access Controller Access Control System) clients
- Charge of Authorization (CoA)

- Telnet server, SSH server
- Telnet client, SSH client
- Remote start of commands via SSH
- SSL
- Macrocommands
- CLI commands logging
- System log
- DHCP autoprovision
- DHCP Relay (Option 82)
- DHCP Option 12
- DHCPv6 Relay, DHCPv6 LDRA (Option 18, 37)
- DHCP server
- PPPoE Circuit-ID tag
- Debugging commands
- Rate limit of traffic to CPU
- Password encryption
- Password recovery
- Ping (IPv4/IPv6 support)
- DNS server (Resolver)


### Monitoring functions

- Statistics on interfaces
- RMON
- IP SLA
- CPU utilization monitoring per task and per traffic type
- RAM utilization monitoring
- Temperature monitoring
- TCAM utilization monitoring

### MIB/IETF

- RFC 1065, 1066, 1155, 1156, 2578 MIB Structure
- RFC 1212 Concise MIB Definitions
- RFC 1213 MIB II
- RFC 1215 MIB Traps Convention
- RFC 1493, 4188 Bridge MIB
- RFC 1157, 2571-2576 SNMP MIB
- RFC 1901-1908, 3418, 3636, 1442, 2578 SNMPv2 MIB
- RFC 1271, 1757, 2819 RMON MIB
- RFC 2465 IPv6 MIB
- RFC 2466 ICMPv6 MIB
- RFC 2737 Entity MIB
- RFC 4293 IPv6 SNMP Mgmt Interface MIB
- Private MIB
- RFC 3289 DIFFSERV MIB
- RFC 2021 RMONv2 MIB
- RFC 1398, 1643, 1650, 2358, 2665, 3635 Ether-like MIB
- RFC 2668 802.3 MAU MIB
- RFC 2674, 4363 802.1p MIB
- RFC 2233, 2863 IF MIB
- RFC 2618 RADIUS Authentication Client MIB
- RFC 4022 MIB for TCP
- RFC 4113 MIB for UDP
- RFC 2620 RADIUS Accounting Client MIB
- RFC 2925 Ping & Traceroute MIB
- RFC 768 UDP
- RFC 791 IP
- RFC 792 ICMPv4
- RFC 2463, 4443 ICMPv6
- RFC 4884 Extended ICMP or Multi-Part messages support
- RFC 793 TCP
- RFC 2474, 3260 DS field in the IPv4 and IPv6 header
- RFC 1321, 2284, 2865, 3580, 3748 Extensible Authentication Protocol (EAP)
- RFC 2571, RFC2572, RFC2573, RFC2574 SNMP
- RFC 826 ARP
- RFC 854 Telnet
- IEC 61850

## Use case

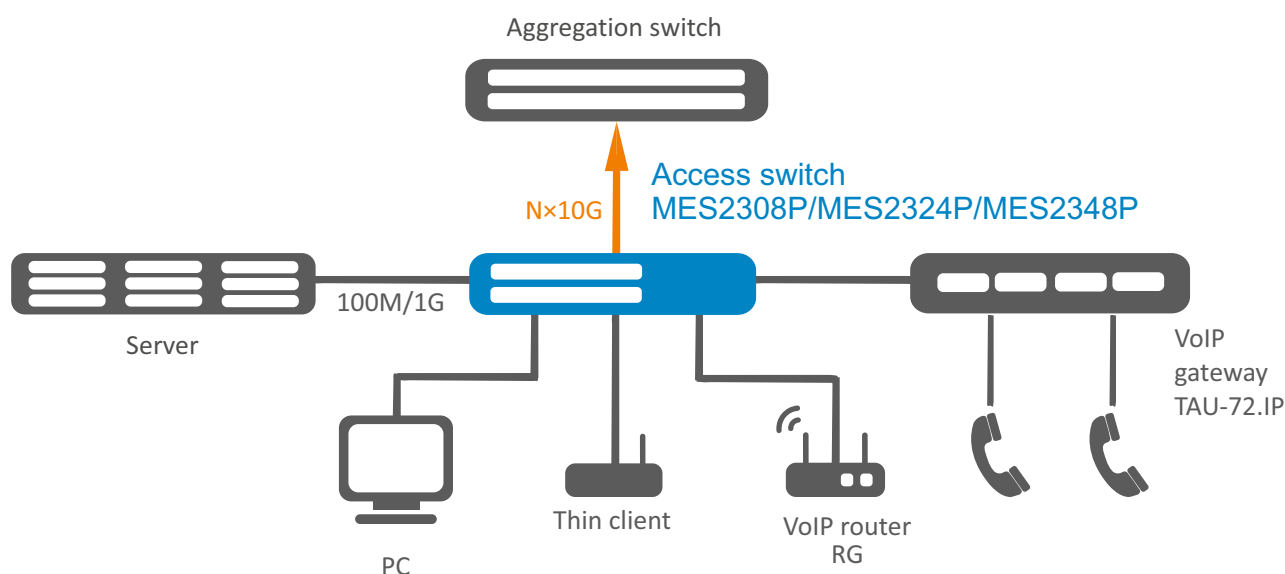

## Physical parameters

|                                                      | MES2308P AC               | MES2308P DC        | MES2324P AC               | MES2324P ACW              | MES2324P DC        | MES2348P                                                                              |
|------------------------------------------------------|---------------------------|--------------------|---------------------------|---------------------------|--------------------|---------------------------------------------------------------------------------------|
| Physical specifications and environmental parameters |                           |                    |                           |                           |                    |                                                                                       |
| Power supply                                         | 170–264 V AC,<br>50–60 Hz | 36–72 V DC         | 170–264 V AC,<br>50–60 Hz | 100–240 V AC,<br>50–60 Hz | 36–72 V DC         | 100–240 V AC,<br>50–60 Hz;<br>36–72 V DC<br>(up to 2 hot-swappable<br>power supplies) |
| Input current                                        | 1.58–1.02 A               | 7.5–3.75 A         | 2.41–1.55 A               | 4.1–1.7                   | 11.4–5.69 A        | 16.0–6.67 A                                                                           |
| Maximum power consumption (including PoE)            | 275 W                     | 280 W              | 445 W                     | 445 W                     | 455 W              | 1600 W                                                                                |
| PoE budget                                           | 240 W                     | 240 W              | 380 W                     | 380 W                     | 380 W              | 1450 W                                                                                |
| Heat dissipation                                     | 35 W                      | 40 W               | 65 W                      | 65 W                      | 75 W               | 150 W                                                                                 |
| Hardware support for Dying Gasp                      | no                        | no                 | no                        | no                        | no                 | no                                                                                    |
| Operating temperature                                | from -20 to +50 °C        | from -20 to +45 °C | from -20 to +50 °C        | from -20 to +50 °C        | from -20 to +50 °C | from -10 to +50 °C                                                                    |
| Storage temperature                                  | from -50 to +70 °C        |                    |                           |                           |                    |                                                                                       |
| Operating humidity                                   | no more than 80 %         |                    |                           |                           |                    |                                                                                       |
| Cooling                                              | passive cooling           | passive cooling    | 2 fans                    | 2 fans                    | 2 fans             | 4 fans                                                                                |
| Form factor                                          | 19", 1U                   |                    |                           |                           |                    |                                                                                       |
| Dimensions (W × H × D)                               | 430 × 44 × 158 mm         | 430 × 44 × 158 mm  | 440 × 44 × 203 mm         | 430 × 44 × 304 mm         | 430 × 44 × 304 mm  | 440 × 44 × 490 mm                                                                     |
| Weight                                               | 2.55 kg                   | 2.35 kg            | 3.16 kg                   | 4.52 kg                   | 4.02 kg            | 9.55 kg                                                                               |

## Ordering information

| Name                | Description                                                                                                                                               |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MES2308P AC</b>  | MES2308P Ethernet switch, 8 ports of 10/100/1000BASE-T (PoE/PoE+), 2 ports of 1000BASE-X, 2 ports of 10/100/1000BASE-T, L3, 170–264 V AC                  |
| <b>MES2308P DC</b>  | MES2308P Ethernet switch, 8 ports of 10/100/1000BASE-T (PoE/PoE+), 2 ports of 1000BASE-X, 2 ports of 10/100/1000BASE-T, L3, 36–72 V DC                    |
| <b>MES2324P AC</b>  | MES2324P Ethernet switch, 24 ports of 10/100/1000BASE-T (RJ-45) with PoE/PoE+ support, 4 ports of 10GBASE-R (SFP+)/1000BASE-X (SFP), L3, 170–264 V AC     |
| <b>MES2324P ACW</b> | MES2324P ACW Ethernet switch, 24 ports of 10/100/1000BASE-T (RJ-45) with PoE/PoE+ support, 4 ports of 10GBASE-R (SFP+)/1000BASE-X (SFP), L3, 100–240 V AC |
| <b>MES2324P DC</b>  | MES2324P Ethernet switch, 24 ports of 10/100/1000BASE-T (RJ-45) with PoE/PoE+ support, 4 ports of 10GBASE-R (SFP+)/1000BASE-X (SFP), L3, 36–72 V DC       |
| <b>MES2348P</b>     | MES2348P Ethernet switch, 48 ports of 10/100/1000BASE-T (RJ-45) with PoE/PoE+ support, 4 ports of 10GBASE-R(SFP+)/1000BASE-X (SFP), L3                    |

## Related products

|                     |                                                              |
|---------------------|--------------------------------------------------------------|
| <b>PM950-220/56</b> | PM950-220/56 power module, 100–240 V AC, 950 W, for MES2348P |
| <b>PM950-48/56</b>  | PM950-48/56 power module, 36–72 V AC, 950 W, for MES2348P    |

## Related software

|                          |                                                                                                                                    |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <b>ECCM-MES2308P_AC</b>  | ECCM-MES2308P_AC option of Eltex ECCM control system to manage and monitor Eltex network elements: 1 network element MES2308P AC   |
| <b>ECCM-MES2308P_DC</b>  | ECCM-MES2308P_DC option of Eltex ECCM control system to manage and monitor Eltex network elements: 1 network element MES2308P DC   |
| <b>ECCM-MES2324P_AC</b>  | ECCM-MES2324P_AC option of Eltex ECCM control system to manage and monitor Eltex network elements: 1 network element MES2324P AC   |
| <b>ECCM-MES2324P_ACW</b> | ECCM-MES2324P_ACW option of Eltex ECCM control system to manage and monitor Eltex network elements: 1 network element MES2324P ACW |
| <b>ECCM-MES2324P_DC</b>  | ECCM-MES2324P_DC option of Eltex ECCM control system to manage and monitor Eltex network elements: 1 network element MES2324P DC   |
| <b>ECCM-MES2348P</b>     | ECCM-MES2348P option of Eltex ECCM control system to manage and monitor Eltex network elements: 1 network element MES2348P         |

## Contact us

## About Eltex

  
+7 (383) 274 10 01  
+7 (383) 274 48 48

  
eltex@eltex-co.ru

  
www.eltex-co.com

**Eltex** Enterprise is a leading Russian developer and manufacturer of communication equipment with more than 30 years of history. Complete solutions and their seamless integrability into the Customer's infrastructure are the priority growth areas of the company.